

insight
SERIES



LiFePO4

INTELLIGENT FEATURES

Up to 128 Parallel Connections

- Intelligent battery-to-battery balancing
- Additive continuous and peak currents
- No additional hardware needed

Heatsink Design

- Strategically located
- Unique passive cooling
- Prevents over-heating of critical components

Dual M8 Terminals (insert and Stud)

- Ample space for connections

LED Indicator

- Provides State of Charge (SOC)

Unique BMS Design

- Microcontroller-based design
- Innovative protection algorithms
- MOSFET-based for ultra-fast response times
- High-resolution internal measurements
- Ultra-low self-consumption
- Non-volatile historical data
- CANbus communication

MODEL

Part Number	24V060-GC2-001
-------------	----------------

FUNCTIONAL SPECIFICATIONS

Nominal Voltage	25.6V
Cell Chemistry	LiFePO4
Cell Type	Prismatic
Ampere-hour Capacity	60Ah
Watt-hour Capacity	1.536kWh
Specific Energy	128Wh/kg
Charge Efficiency	99%
Impedance (50% SOC, 1kHz)	<100mΩ
Cycles @ 80% DOD	>6000

MECHANICAL SPECIFICATIONS


BCI Size	GC2
Dimensions (LxWxH)	260 x 180 x 276 mm
Weight	26.4 lbs (12 kg)
Case Material	ABS
Stud Terminal	M8 X 1.25 - 20
Insert Terminal	M8 X 1.25 - 20
Handles	Molded
Ingress Protection Marking	IP67
Case Flame Rating	UL94 V-0

DISCHARGE SPECIFICATIONS

Continuous Discharge Current	150A
Discharge Current (30-sec)	275A
Max Discharge Current (10-sec)	300A
Short Circuit Protection	1000A
Low Voltage Disconnect	20V (5s)
Low Voltage Reconnect	Reset & Charge
Self-Discharge per Month @ 25°C	Idle 1.2%, Sleep 0.12%

CHARGE SPECIFICATIONS

Continuous Charge Current	50A
Max Charge Voltage	29.2V
Recommended Charge Voltage	28V
Float Voltage	27.6V
High Voltage Disconnect	30.4V (4s)
High Voltage Reconnect	Automatic
Temperature Compensation	None

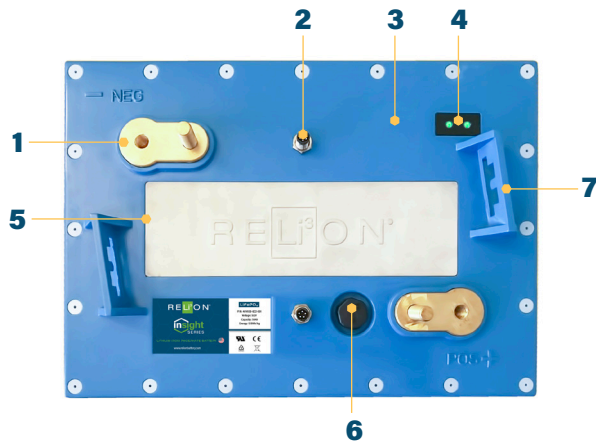

- 1. Dual M8 Terminals (insert & stud)
- 2. CANbus Input/Output
- 3. Wake-Up Button
- 4. SOC/Status LEDs
- 5. Heatsink
- 6. Vent
- 7. Lifting Brackets

ENVIRONMENTAL SPECIFICATIONS

*Charge Temperature	-20°C to 45°C
Discharge Temperature	-20°C to +60°C
Operating Humidity	<90% RH
Storage Temperature	-40°C to +60°C
Storage Humidity	25 to 85% RH

*For charging below 0°C see Charging Instructions

CERTIFICATIONS

UL2580 (Cell)
UL2271 (Battery Pack)
CE (Battery Pack)
UN 38.3 (Battery Pack)

APPLICATIONS

Traction and Stationary Including:

- Utility Vehicles
- Floor Machines
- AWP
- Marine
- Solar
- Back-Up

SHIPPING CERTIFICATIONS

UN 3480, Class 9

